



## Overview


- Wireless communication on ISM band at 865-867MHz (India), 868MHz (EU), 902-928MHz (Americas and Australia).
- Up to 1 Km range on Line of Sight.
- Encrypted communications by AES 128bits.
- Auto routable.
- Modbus RTU wireless transmission
- Modbus RTU RS485 transmission
- Power range: 9Vdc@80mA <=> 30Vdc@24mA
- Count of pulses and real input status stored in an internal Modbus register.
- One Open Drain output.
- DIN-Rail mounting
- Firmware updatable via microUSB.
- Capable to be adapted to other industrial communication protocols.

## Characteristics


<b>General</b>  Power supply: 9Vdc@80mA to 30Vdc@24mA Consumption: <1 W		<b>Working conditions</b>  Working temperature: -25 .. +70°C Storage temperature: -40 .. +70°C Humidity range: 5 – 95%, w/o condensation	
<b>Radio</b>  <b>Frequency:</b> 865-867MHz (India), 868MHz (EU), 902-928MHz (Americas and Australia) Sensitivity: -104dBm typ RF Power: Up to +26 dBm Range: Up to 1km Antenna: SMA Female connector – not included		<b>Regulatory approvals</b>  UNE-EN 60950-1:2007 +Corr:2007+A11:2009+A1:2011 +A12:2011/AC2012(Partial) UNE-EN 61000-6-1:2007 UNE-EN 61000-6-3:2007 UNE-EN 55 022:2011 + Err (UNE-EN55022:2011/AC) UNE-EN 55 024:2011 EN 301489-1 v1.8.1 (2008-02)(Partial)(1 – 6 GHz Band)	
<b>Interfaces</b>  microUSB: Configuration port (19200 bps UART) RS485: Up to 1.2 km distance, speed up to 19.2 kBaud		<b>Physical characteristics</b>  Dimensions: 18x89x59 mm Material: PC/ABS Protection type: IP20	
<b>Digital inputs/outputs</b>  Pulse input: Operating mode selectable by jumper: wet contact (up to 30Vdc), dry contact, open-collector or S0 type. Detecting frequency: up to 30Hz  Discrete output: Open Drain 2A		<b>Mounting</b>  DIN rail	
<b>Protocols</b>  Modbus RTU, Wireless AES128 Encrypted Mesh		<b>Other features</b>  Made in EU	



## Dimensions (mm)

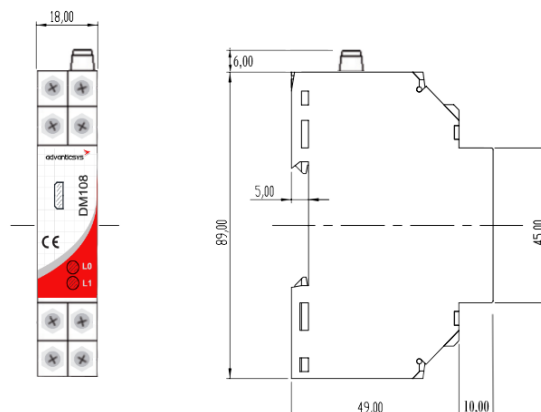

## Connections

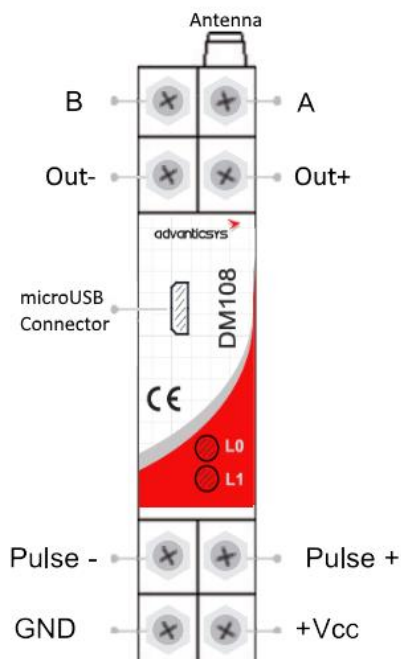

Description of connections	
<b>Antenna</b>	SMA Connector for 868MHz antennas
<b>A</b>	Terminal A RS485.
<b>B</b>	Terminal B RS485.
<b>Out+</b>	Terminal of the Drain of the driver.
<b>Out-</b>	Terminal connected internally with the DM108 ground.
<b>Pulse+</b>	Positive Pulse Input Terminal
<b>Pulse -</b>	Negative Pulse Input Terminal
<b>+Vcc</b>	Power Source Positive Terminal
<b>GND</b>	Power Source Ground Terminal
<b>microUSB connector</b>	May used as UART to recover a configuration. Also for firmware update
LEDS	
<b>L0</b>	Blink each 10000 work cycles.
<b>L1</b>	Blink with any transmission or reception in any of each communication channel.

## Pulse Counter

The pulse counter of DM-108 saves number of pulses received (in falling edge) in two Modbus registers (forming a **32bit variable**) allocated in **non-volatile memory**. This registers can be modified with the desired value. In case of overflowing, the counter restarts with value '0'. Please, read the user manual to view how to manage the Modbus registers of the Pulses counting. DM108 is capable to measure up to 30 pulses per second.

## Open Drain Output

The output, as open drain, could be connected in serial with power supplies to manage the ON/OFF of Low power devices. Also it can be used with relays or contactors. The output has the capacity to drive up to 2A.

With the Modbus registers of DM108, the output could have three behaviors:

1. Constant Output. The output has continuously the value programmed via Modbus register.
2. Pulse Output: A unique pulse is generated, with a concrete width, programmed all via Modbus registers.
3. PWM Output: A constant PWM output could be generated, with ON and OFF cycles programmable via Modbus registers.

The information contained in this datasheet is subject to change without notice. Make sure you are using the latest version.

### Advantic Sistemas y Servicios S.L

Zurbano,83 – 3A  
28003 Madrid – SPAIN



[www.advanticsys.com](http://www.advanticsys.com)

[info@advanticsys.com](mailto:info@advanticsys.com)

+34 91 422 10 23