




AMS-10C AMS-10S

Mini Contact with Leads and Snap-Off Tabs

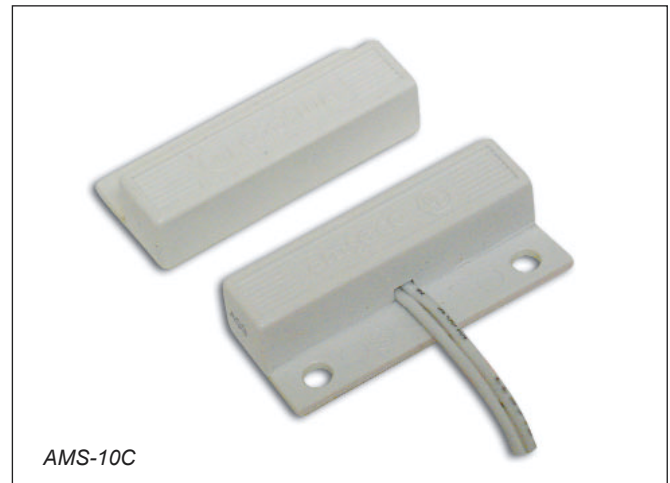

AMS-10C



Description


The AMPS-10 series are mini-contacts with two types of leads. The AMS-10C is center lead and AMS-10S is side lead. Both models have an operating gap of 3/4" minimum. The AMS-10 series are SPST normally open for closed loop circuits (circuit is closed when magnet is engaged).

These units have reed switches with rhodium-plated contacts. The magnet is Alnico 5 with AWG#22 lead wires that are 25 inches in length.

Features

- Reed-actuated for high reliability
- Alnico 5 magnet
- AWG#22, 25" in length
- Self-adhesive or screw mount
- UL Vo grade ABS resin epoxed
- Available colors: Brown, Gray, Ivory, White

Dimensions: inches(mm)

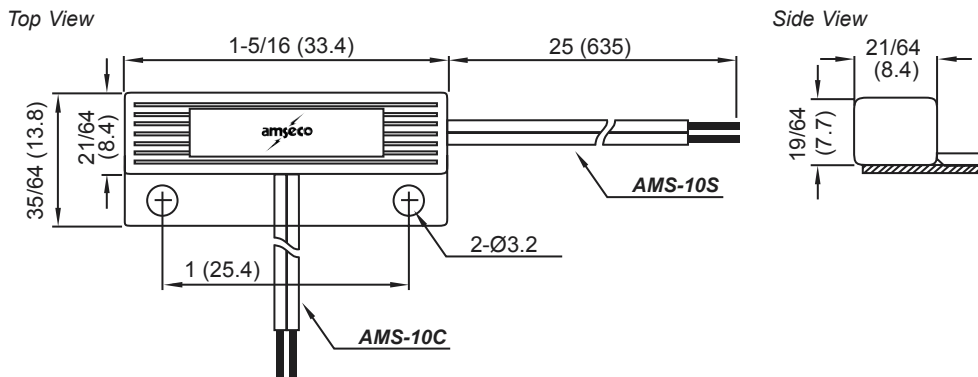

Specifications

Model Number	Lead Wire	Operating Gap	Contact Type	Max. Switching Current	Max. Carry Current	Breakdown Voltage	Rating	Magnet Type	Mounting Method	Operating Temperature Range
AMS-10C	Center Lead	Minimum 3/4"	N.C.	0.3A	1.0A	200 VDC Minimum	10VA	Alnico 5	Self-adhesive and Screw-mount	32°F ~ 120°F (0°C ~ 49°C)
AMS-10S	Side Lead									

*N.C. contacts are closed with magnet engaged. *N.O. contacts are open with magnet engaged.